


# TalonLock Fascia VE

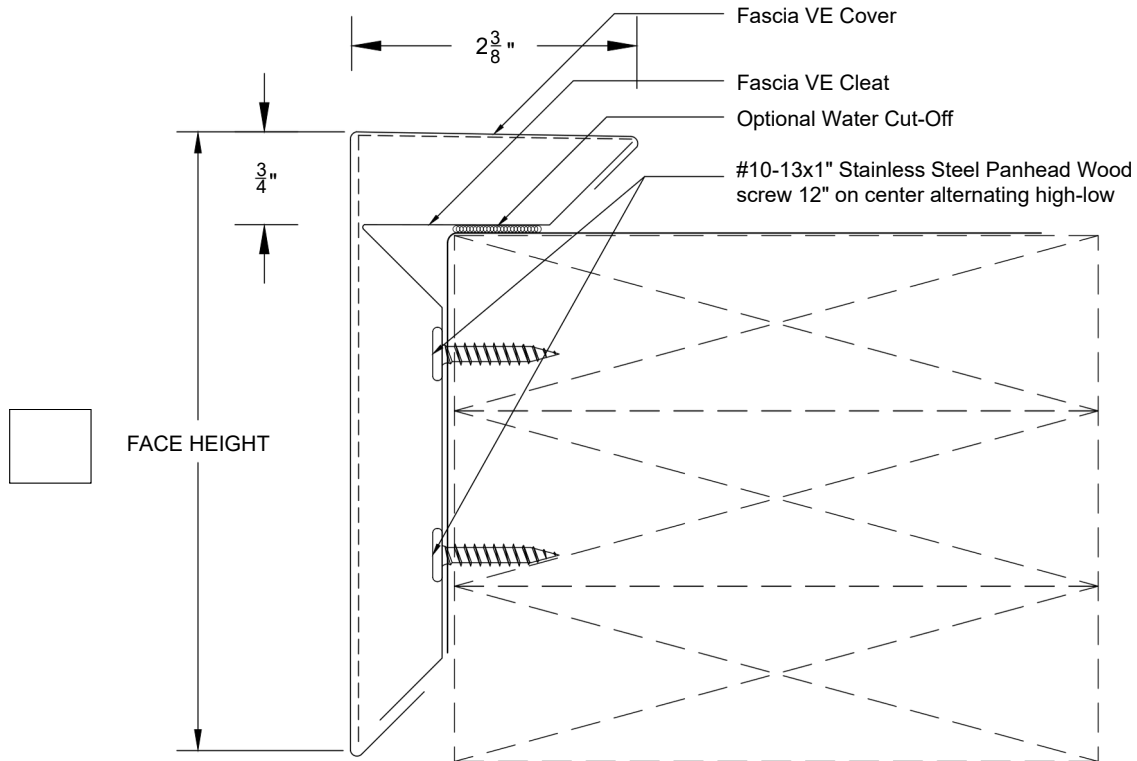

| Cover Material | Cleat Material | Face Size | ES-1 Certified Pressure |
|----------------|----------------|-----------|-------------------------|
| .040" Aluminum | 22ga G-90      | 3" to 8"  | -240 PSF                |
| 24ga Galvalume | 22ga G-90      | 3" to 8"  | -240 PSF                |
| .040" Aluminum | 20ga G-90      | 8" to 12" | -100 PSF                |

## PROJECT DETAILS

Job Name: \_\_\_\_\_

Customer: \_\_\_\_\_

Date: \_\_\_\_\_

Linear feet: \_\_\_\_\_

Outside miter: \_\_\_\_\_

Inside miter: \_\_\_\_\_

End cap (left): \_\_\_\_\_

End cap (right): \_\_\_\_\_

Color:

\*Not all color and gauge combinations are available, please reach out to your MetalWyze representation to confirm availability.

Material:

Other: \_\_\_\_\_

Finish:

## Notes: