


# TalonLock Gravel Stop

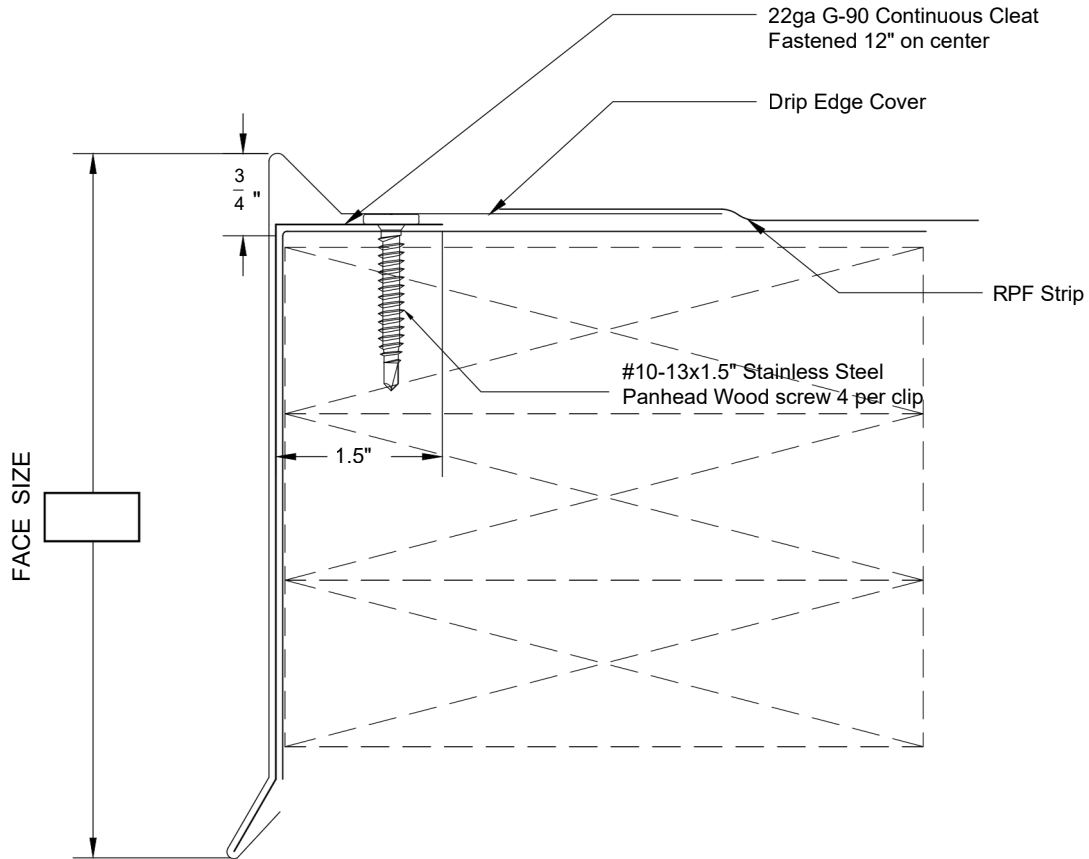

Cover Material	Cleat Material	Face Size	ES-1 Certified Pressure
.040" Aluminum	22ga G-90	up to 8"	-180 PSF
24ga Galvalume	22ga G-90	up to 8"	-170 PSF

## PROJECT DETAILS

Job Name: \_\_\_\_\_

Customer: \_\_\_\_\_

Date: \_\_\_\_\_

Linear feet: \_\_\_\_\_

Outside miter: \_\_\_\_\_

Inside miter: \_\_\_\_\_

End cap (left): \_\_\_\_\_

End cap (right): \_\_\_\_\_

**Color:**

\*Not all color and gauge combinations are available, please reach out to your MetalWyze representation to confirm availability.

**Material:**

Other: \_\_\_\_\_

**Finish:**

**Notes:**